

V2 MEDIA CONTROLLER

FEATURES


- Provided Projector /Screen Control via R232 Commands
- reliable capacitive touch panel with longer life cycle
- able to configure as Master / Slave / Stand alone
- one touch selection with buzzer sound
- pre-programmed control protocols for different projector models

TECHNICAL SPEC

Configuration:	1 x RS232
Com Port:	(9600, 8 Data Bit, Non parity and 1 stop bit)
Configuration:	2 x RS232 (8 Data Bit and 2 Stop Bit)
Com Port:	Baud Rate (9600 to 115200)
Output:	Parity Bit (Non, Even or Odd) 2 x IR out screen control RS232 (for dry contact /low voltage only)
Digital I/O:	External control for screen relay
Control Button:	Number of user defined "Control Button" x 11, Available protocol for each "Control Button" x2
Power Adaptor:	12V-DC, 500mA
Dimensions:	8.5cm (W) x 8.6cm (L) x 3.9cm (D)
Weight:	175g



MEDIA CONTROLLER

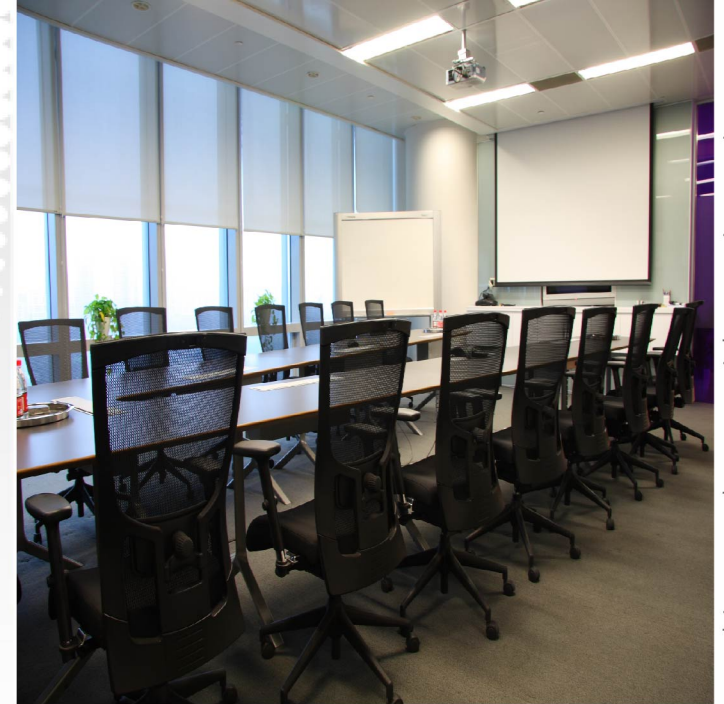

INTEGRATED CONTROL SWITCHER

V2 can be easily integrated and act as an extended central media control unit. Functions include an universal projector control with control a projector and screen's power on/off, input switching and volume control via RS-232 or IR control.