

V1 PROJECTOR CONTROLLER

FEATURES

- Display controller for your projector
- One touch selection with LED back light indications
- Self-Programming features for different projector model
- Built-in signal amplifier for 350 MHz
- Digital volume control for sound level adjustment

TECHNICAL SPEC

Input	3 x PC input (D-Sub 15 pin) 3 x PC audio (3.5mm) 1 x Composite video (RCA) 1 x Stereo Audio 1 x Internal Aux In 1 x Microphone (6.3mm) 1 x USB (OPTIONAL) 1 x HDMI (OPTIONAL)
Output:	1 x VGA to Projector 1 x VGA to Monitor (D-Sub 15 pin) 1 x C-Video
VGA Bandwidth:	3 in 2 out VGA Distribution Amplifier (Individual Selection)
Max Resolution:	1920 x 1080
Cable Length Configurable:	Up to 30M
Control Port:	1 x RS-232 (8 Data Bit and 1 Stop Bit)
Baud Rate:	9600 to 115200
Parity Bit:	Non, Even or Odd
Volume:	Digital Volume Control
Mic Gain:	Microphone Input Gain Control (Digital)
Dimensions:	145mm (L) x 850mm (W) x 50mm(D)
Weight:	350 gram
Power Adaptor:	9V - 12V-DC 500mA





INTEGRATED CONTROL SWITCHER

Designed to control your Audio Visual Equipment in the most simplified ways via RS232 commands; reasonably priced and works with most projectors.

V1 PROJECTOR CONTROLLER

configuration

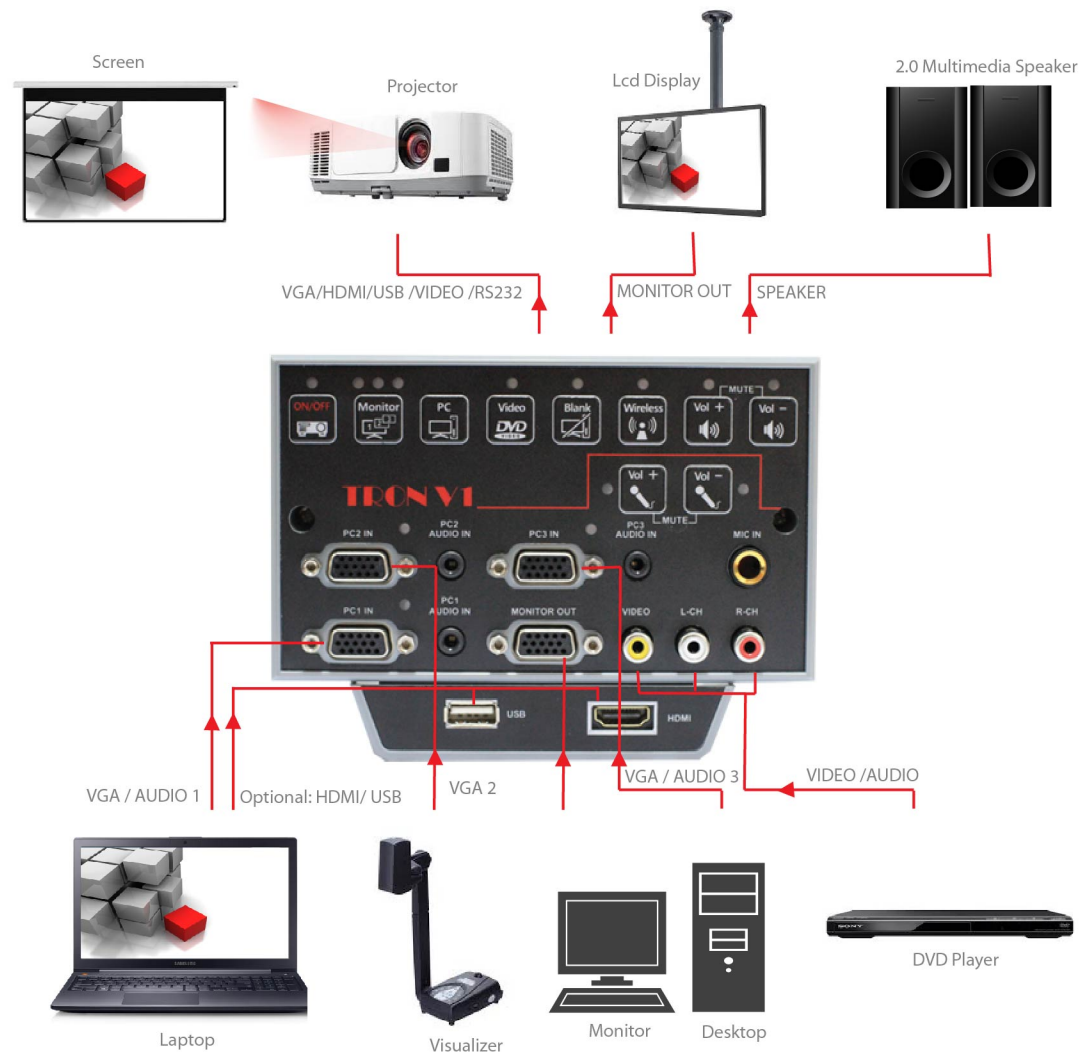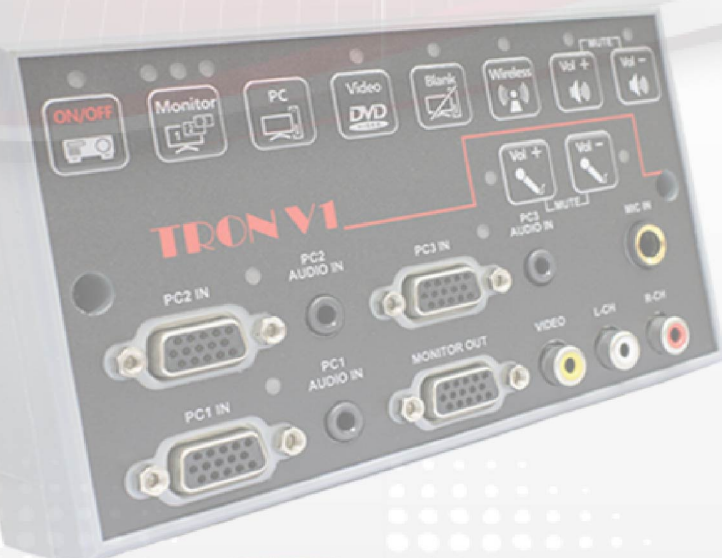

INTEGRATED
CONTROL SWITCHER