


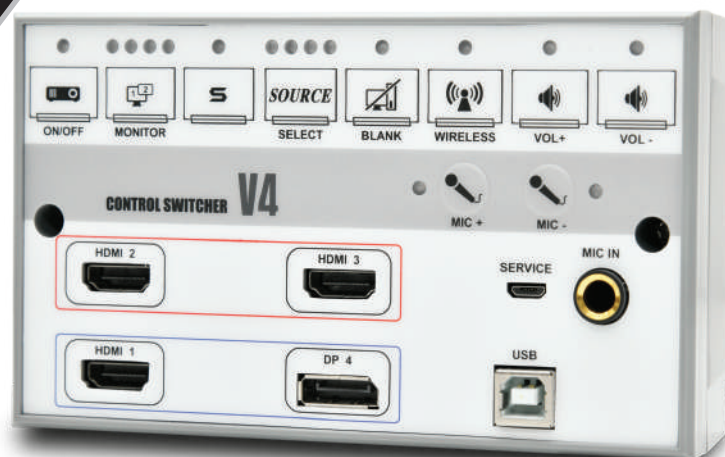

V4 PROJECTOR CONTROLLER

The V4 Projector Controller is designed to control your AV Equipment via RS232. This controller is user friendly and can easily be mounted on walls, lectern, desktops or even racks.

Presenters without any training would be able to walk into any of these multimedia classrooms or boardrooms to operate this system. With this identical projector controller in every room, users will be able to operate this controller effortlessly, irregardless of the type or brand of projectors being used. This standardization will make operation, setup and maintenance easier.

V4 PROJECTOR CONTROLLER

SPECIFICATIONS

INPUT


HDMI	x 3
Display Port	x 1
Microphone (6.3mm)	x 1
USB -B (Optional: USB Buffer)	x 1
Stereo Audio (3pin -JST XH2.5mm -for projector's audio out)	x 1

OUTPUT

HDMI - (1 for projector, 1 for monitor)	x 2
Stereo Audio (3pin -JST XH2.5mm connector -audio out)	x 1
USB (5pin -JST XH2.5mm connector) -Optional: USB Buffer	x 1
RS232 (3pin -JST XH2.5mm connector)	x 2

CONTROL BUTTON:	Number of user defined "Control Button"	x 10
MAX RESOLUTION:	1920 x 1080 (FULL HD)	
ALL CABLE LENGTH:	Up to 20 meter	
CONFIGURATION:	RS232 (8 Data Bit and 1 Stop Bit)	
COM PORT:	Baud rate (9600 to 115200)	
	Parity Bit (Non, Even or Odd)	
	Programmable projector protocol	
LED:	With LED for indication and confirmation	
VIDEO SELECTION:	All HDMI/ VGA Input Switching	Digital
AUDIO SELECTION:	Audio Switching	Digital
VOLUME:	Main Volume Control	Digital
MIC GAIN:	Microphone Input Gain Control	Digital
POWER ADAPTOR:	12V-DC, 700mA	
HOUSING:	ABS Enclose	
DIMENSIONS:	148 x 86 x 49 mm (Standard UK Two gang casing)	
WEIGHT:	350g	

V4

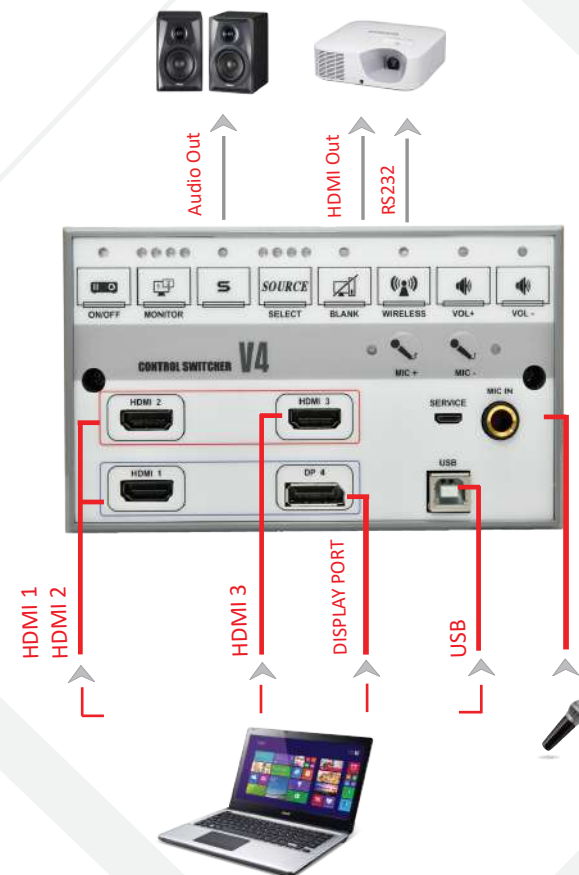

FEATURES

- ✓ Built in Audio Embedder/ De-embedder
- ✓ 2 x RS232 for 2 different projector on/off simultaneously
- ✓ 1 x RS232 link to power on/off 2nd Controller
- ✓ Works well with any monitors, projectors as well as interactive system
- ✓ Supports 4 in 2 out Matrix Switching
- ✓ Fully self contained / integrated projector controller with AV switcher
- ✓ Built in USB buffer with best connective for interactive system (Optional)