




V3H PROJECTOR CONTROLLER

The V3H Projector Controller is designed to control your AV Equipment via RS232. This controller is user friendly and can easily be mounted on walls, lectern, desktops or even racks.

Presenters without any training would be able to walk into any of these multimedia classrooms or boardrooms to operate this system. With this identical projector controller in every room, users will be able to operate this controller effortlessly, irregardless of the type or brand of projectors being used. This standardization will make operation, setup and maintenance easier.

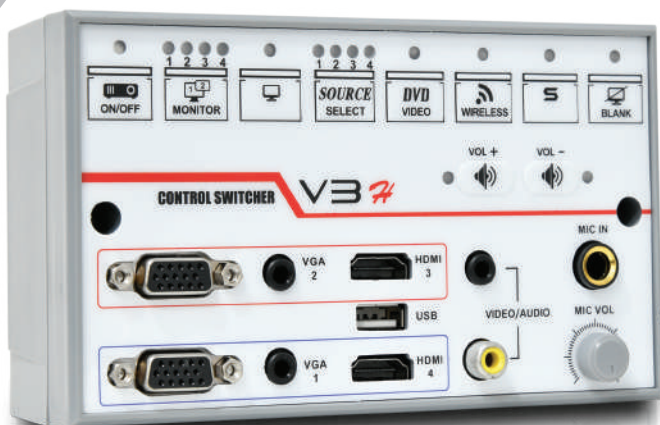

SPECIFICATIONS

INPUT

VGA (D-sub 15 pin) with audio (3.5mm)	x 2
Composite Video (RCA)	x 1
Stereo Audio (3.5mm Mini Jack)	x 1
Stereo Audio (3pin -JST XH2.5mm -for projector's audio out)	x 1
Microphone (6.3mm)	x 1
HDMI (19 pin female)	x 2
USB -A (Optional: USB Buffer)	x 1

OUTPUT

HDMI (1 for Projector, 1 for Monitor)	x 2
USB (5pin -JST XH2.5mm connector) -Optional: USB Buffer	x 1
Composite Video (2pin -JST XH2.5mm connector)	x 1
Stereo Audio (3pin -JST XH2.5mm connector)	x 1
Stereo Audio (3.5mm Mini Jack)	x 1
RS232 (3pin -JST XH2.5mm connector)	x 2

CONTROL BUTTON:	Number of user defined "Control Button"	x 10
	Available protocol for each "Control Button"	x 1

MAX RESOLUTION: 1920 x 1080 (FULL HD)

ALL CABLE LENGTH: Up to 20 meter

CONFIGURATION: RS232 (8 Data Bit and 1 Stop Bit)

COM PORT:
Baud rate (9600 to 115200)
Parity Bit (Non, Even or Odd)
Programmable projector protocol

LED: With LED for indication and confirmation

VIDEO SELECTION: All HDMI/ VGA Input Switching Digital

AUDIO SELECTION: Audio Switching Digital

VOLUME: Main Volume Control Digital


MIC GAIN: Microphone Input Gain Control Analog

POWER ADAPTOR: 12V-DC, 700mA

HOUSING: ABS Enclose

DIMENSIONS: 148 x 86 x 44 mm (Standard UK Two gang casing)

WEIGHT: 330g

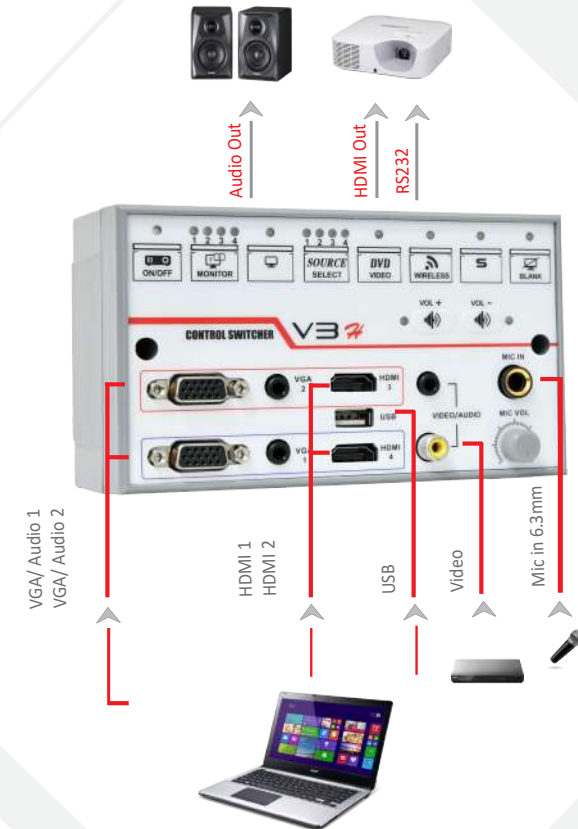

FEATURES

- ✓ Built in VGA to HDMI Converter
- ✓ Built in Audio Embedder/ De-embedder
- ✓ 2 x RS232 for 2 different projector on/off simultaneously
- ✓ 1 x RS232 link to power on/off 2nd Controller
- ✓ Works well with any monitors, projectors as well as interactive system
- ✓ Supports 4 in 2 out Matrix Switching
- ✓ Fully self contained / integrated projector controller with AV switcher
- ✓ Built in USB buffer with best connective for interactive system (Optional)