



V3HE PROJECTOR CONTROLLER

The V3HE Projector Controller is designed to control your AV Equipment via RS232. This controller is user friendly and can easily be mounted on walls, lectern, desktops or even racks.

Presenters without any training would be able to walk into any of these multimedia classrooms or boardrooms to operate this system. With this identical projector controller in every room, users will be able to operate this controller effortlessly, irregardless of the type or brand of projectors being used. This standardization will make operation, setup and maintenance easier.



V34E PROJECTOR CONTROLLER

SPECIFICATIONS

INPUT

VGA (D-sub 15 pin) with audio (3.5mm)	x 1
Composite Video (RCA)	x 1
HDMI (19 pin female)	x 2
Stereo Audio (3pin -JST XH2.5mm connector)	x 1
RS232 (3pin -JST XH2.5mm connector)	x 1
Microphone (6.3mm)	x 1
USB -A (Optional: USB Buffer)	x 1

OUTPUT

Cat 5E/6 POC to Receiver (RX) -up to 100M	x 1
HDMI (for Monitor)	x 1
RS232 (3pin -JST XH2.5mm connector)	x 2
Stereo Audio (3pin -JST XH2.5mm connector)	x 1
Stereo Audio (3.5mm Mini Jack)	x 1
RS232 (3pin -JST XH2.5mm connector)	x 2
USB (5pin -JST XH2.5mm connector) -Optional: USB Buffer	x 1

CONTROL BUTTON:	Number of user defined "Control Button"	x 8
	Available protocol for each "Control Button"	x 1

MAX RESOLUTION: 1920 x 1080 (FULL HD)

ALL CABLE LENGTH: Up to 20 meter

CONFIGURATION: RS232 (8 Data Bit and 1 Stop Bit)

COM PORT: Baud rate (9600 to 115200)
Parity Bit (Non, Even or Odd)
Programmable projector protocol

LED: With LED for indication and confirmation

VIDEO SELECTION: All HDMI/ VGA Input Switching Digital

AUDIO SELECTION: Audio Switching Digital

VOLUME: Main Volume Control Digital

MIC GAIN: Microphone Input Gain Control Analog


POWER ADAPTOR: 12V-DC, 700mA

HOUSING: ABS Enclose

DIMENSIONS: 148 x 86 x 44 mm (Standard UK Two gang casing)

WEIGHT: 330g

34E

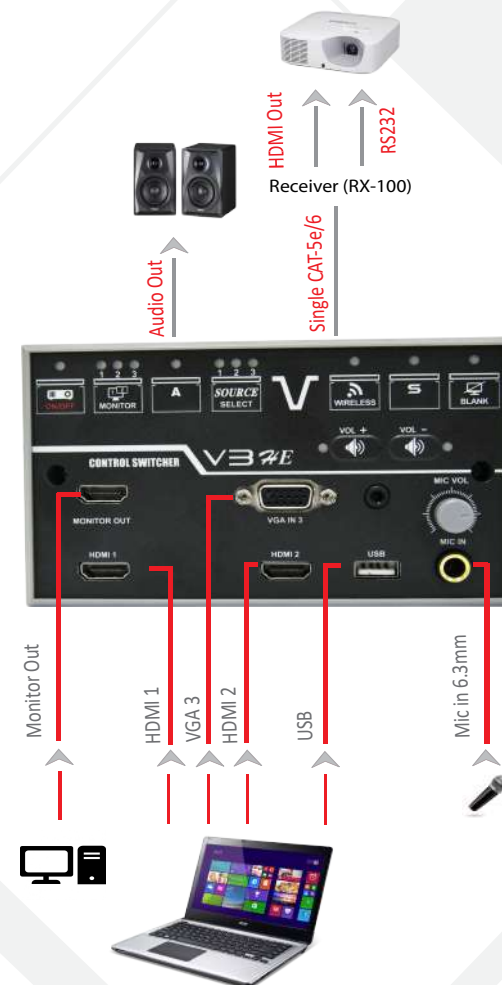

FEATURES

- ✓ Built in VGA to HDMI Converter
- ✓ Built in Audio Embedder/ De-embedder
- ✓ 2 x RS232 for 2 different projector on/off simultaneously
- ✓ 1 x RS232 link to power on/off 2nd Controller
- ✓ Works well with any monitors, projectors as well as interactive system
- ✓ Supports 3 in 2 out Matrix Switching
- ✓ Fully self contained / integrated projector controller with AV switcher
- ✓ Built in USB buffer with best connective for interactive system (Optional)